



Style of Bank	Without Height Adjuster			With Height Adjuster		
	Dimension A	Dimension B	Spread	Dimension A	Dimension B	Spread
Fan Aluminum	9' 8½"	1' 9¼"	1' 5½"	9' 11½"	3' 0"	1' 5½"
Fan Fiberglass	9' 8½"	2' 1½"	1' 5½"	9' 11¼"	3' 0"	1' 5½"
Fan Glass	N/A	N/A	N/A	N/A	N/A	N/A
72" x 42" Rectangular Fiberglass	9' 9"	2' 2"	1' 5½"	10' ¼"	3' 0"	1' 5½"
72" x 42" Rectangular Glass	9' 9¼"	2' 11¼"	2' 7½"	9' 10½"	3' 0"	1' 5½"
72" x 42" Rectangular Steel	9' 8½"	2' 1⅜"	1' 5½"	10' 1⅛"	3' 0"	1' 5½"
72" x 42" Rectangular Wood	9' 9"	3' 0"	2' 7½"	9' 10½"	3' 0"	1' 5½"

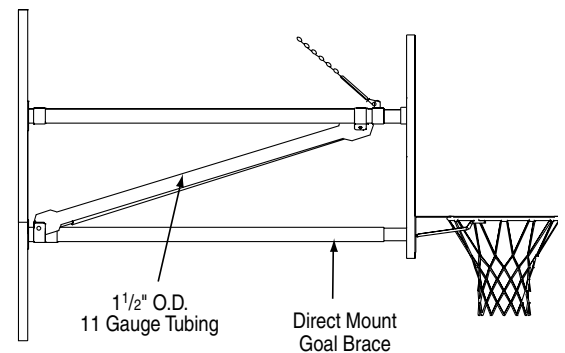

Progressive offers a 25-year limited warranty on the basketball backstop structure.

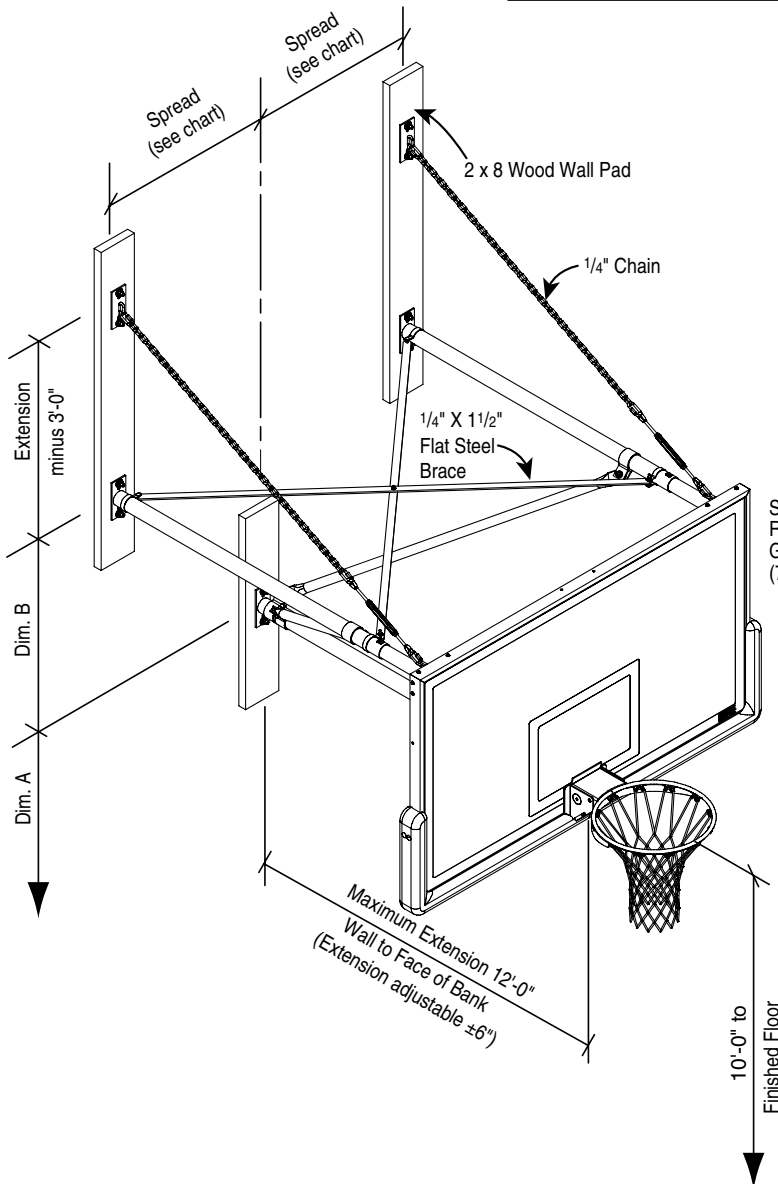

PROJECT:	_____
ARCHITECT:	_____
CONTRACTOR:	_____
SUPPLIER:	_____
DATE:	_____
REVISED:	_____

Specifications—Progressive 1350**Wall Mounted Stationary Backstop with Direct Goal Brace (12"-144")****Product Description**

EXTENSION: Backstop shall be a wall mounted and wall braced style with the bank face being extended (12" to 144") (30 cm to 366 cm) from the supporting wall. Extension frame shall be constructed of (3) 2½" (6.35 cm) OD 13 gauge and 2¼" (5.72 cm) OD 14 gauge steel tubes terminating with fabricated heavy steel plates for attachment to wood all pads and the backboard. Upper extension frame legs attach to corners of backboard. The third extension frame leg shall be mounted at the bottom center to serve as a direct mount goal brace, transferring stress loads directly from the goal to the backstop frame. Frame shall be adjustable for a plus or minus 6" (15.24 cm) variation from face of bank to wall.

BRACING: Frame shall be braced horizontally by use of ¼" x 1 ½" (6.35 mm x 38.1 mm) steel cross brace terminating in precision die formed clamps. Extension frame legs to be further braced two 1 ½" (38.1 mm) O.D. diagonal tubes connecting each top leg to the bottom leg.

SUPPORT: Backstops with extensions greater than 3'-0" (91.44 cm) or with height adjusters will be supported in playing position by two ¼" (6.35 mm) welded link chains with turnbuckles for leveling.

MOUNTING: Backstop shall be provided with 2 x 8 (5.08 x 20.32 cm) southern yellow pine wall pads at attachment points. All edges shall be chamfered and finished with high-gloss polyurethane.

FINISH: All metal parts shall be finished with choice of gloss black or gloss white powder coat. Other colors are optionally available.

WARRANTY: There is a 25-year limited warranty on all Progressive backstop structures and fittings.

OPTIONS: Backstop can be provided with any of several different styles of backboards goals and padding. Specify types desired.

Accessories**Height Adjusters (see separate sheets):**

- 503093**— For motorized 8'-10' (244 cm-305 cm) height adjustment of rectangular bank.
- 503097**— For motorized 8'-10' (244 cm-305 cm) height adjustment of fan bank.
- 503095**— For motorized 8'-10' (244 cm-305 cm) height adjustment of rectangular bank with wireless remote control.
- 503098**— For motorized 8'-10' (244 cm-305 cm) height adjustment of fan bank with wireless remote control.
- 503096**— For motorized 8'-10' (244 cm-305 cm) height adjustment of rectangular bank with EZ Stick Power Wand.
- 503099**— For motorized 8'-10' (244 cm-305 cm) height adjustment of fan bank with EZ Stick Power Wand.
- 503092**— For manual 8'-10' (244 cm-305 cm) height adjustment of Rectangular backboards.
- 503094**— For manual 8'-10' (244 cm-305 cm) height adjustment of fan backboards.

LEED® Submittal Information

Credit	Measure	
MRc4 – Recycled Content	Post Consumer Average 26.90%	Post Industrial 0%
MRc5 – Regional Materials	Raw materials are commodity items from multiple sources so extraction point cannot be determined. Final Manufacturing/Assembly in Spiceland, IN 47385.	