
## Deluxe Adjustable Chinning Bar



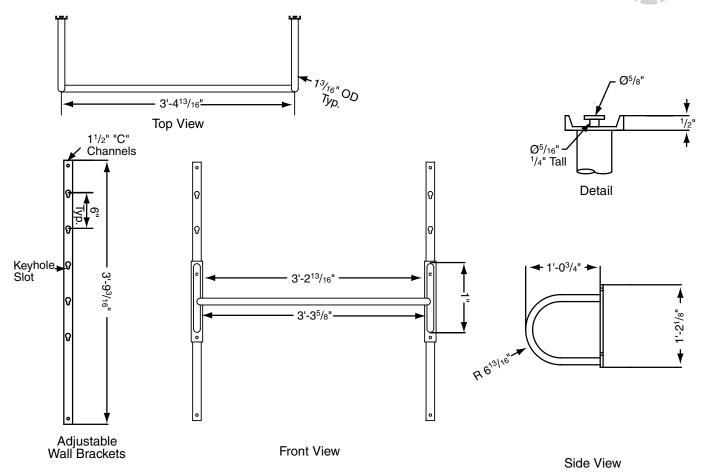

## Specifications—Deluxe Adjustable Chinning Bar

Deluxe Adjustable Chinning Bars, #502015 by Progressive Sports Construction Group, of Spiceland, IN.

Bar assembly shall be 13/16" O.D. diameter steel tubing that is 3'4¾" long and constructed with galvanized tubing that is saddle cut and welded to two formed 13/16" O.D. galvanized extension frames that extend bar 13¼" from attachment point. Bar and formed extension frames are securely welded to 2" steel channel creating a chinning bar assembly that is designed for maximum strength and durability. Channel shall include welded steel ¼" tall 5/16" dia. studs with 5/8" dia. heads that allow for use with adjustable wall brackets. Chinning bar assembly shall be finished with durable and attractive gloss black powder coat.

Adjustable wall brackets shall be constructed with a 1½" galvanized steel channel measuring 45³/16" long. Wall brackets to include keyhole slots to accept studs on back of Chinning bar assembly. Keyhole slots to be located to allow for height adjustment in 6" increments.

Printed in U.S.A.



765-987-7999 866-637-5611 411 S. Pearl St. Spiceland IN 47385 USA

Spiceland IN 47385 USA
www. progressivescg.com
Copyright © 2015 Draper Inc. Form PSCG\_DeluxeAdjustableChinBar\_Sub15

PROJECT:
ARCHITECT:
CONTRACTOR:
SUPPLIER:
DATE: REVISED: