

Climbing Ropes

Specifications – Climbing Ropes

Product Description

Manila: Climbing rope shall be 1½" dia., and shall be constructed of 3 strands of "Grade A" manila. Rope shall be secured at top to a cast, ductile iron fitting. Bottom of rope shall feature (whipped/turk knot/polyboot) end.

PolyPro Rope: Climbing rope shall be 1½" dia., and shall be constructed of Unmanila material. Rope shall be secured at top to a cast, ductile iron fitting. Bottom of rope shall feature (whipped/turk knot/polyboot) end.

PolyPlus: Climbing rope shall be 1½" dia. Core shall be constructed of polypro, covered with polyester. Rope shall be secured at top to a cast, ductile iron fitting. Bottom of rope shall feature (whipped/turk knot/polyboot) end.

Accessories

Woven Knots shall be spliced into the rope. Specify how many and location desired. Shall be available on all ropes.

Large Tied Knots. Specify how many and location desired. Shall be available on all ropes.

Rubber Balls. Specify how many and location desired. Shall be available on Manila and Poly Plus ropes.

502003—Adjustable Beam Clamp shall be made of 5/8" steel with threaded rod for adjustment. Clamp locks into position with hex nut and lock washer. Includes ½" zinc-plated Quick Link for attachment of climbing rope to ceiling attachment.


502004—Tambourine shall be constructed of ½" lacquered plywood, and shall clamp to any position on the rope to set upper limit of climbing.

502005—Rope Hoist shall consist of ¼" polyester rope, connected to rope cleat mounted on wood wall pad. Rope shall pass through pulley mounted on pulley plate, located above wood pad. A loop shall be formed using quick links and cable clamps. Weight bag with quick link shall be attached to the loop. Rope shall be trimmed to desired length. Hardware for mounting wood pad to wall shall be provided by others to meet requirements of specific wall construction. 70 lb. limit.

502014—Safety Cable Attachment shall be constructed of 1/8" dia. x 5' steel cable, 6 cable splices, and a 1¼" clamp, which shall attach to the rope. Safety Cable Attachment shall be attached to or hung over primary supporting framework after rope installation is complete.



PolyPlus
(Shown with Rubber Balls and Polyboot)

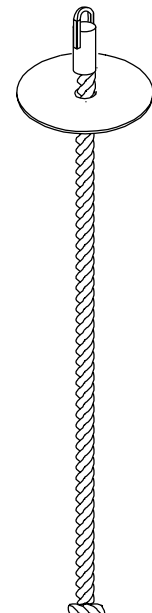

PolyPro
(Shown with knot end and Tambourine)



Manila
(Shown with Safety Cable Attachment and Whipped End)

Please Mark Appropriate Selections

Select Rope:


- Manila How Many: _____
 PolyPro How Many: _____
 PolyPlus How Many: _____
 Total Length (attachment point to finished floor) _____
 Extra Length: _____

Choose End:


- Whipped
 Knot
 Polyboot

Optional Accessories:

- Tambourine
 Beam Clamp with Quick Link
 Safety Cable Attachment How many? _____
 Knots
 Rubber Balls Number _____ Location Desired _____
 Large Tied Knots Number _____ Location Desired _____
 Woven Knots Number _____ Location Desired _____
 Rope Hoist

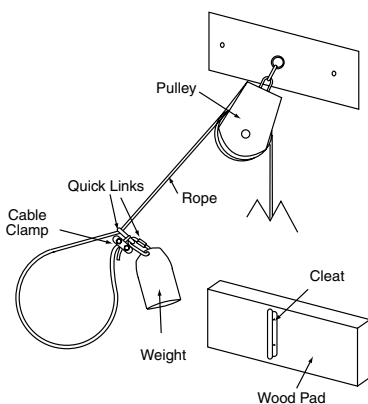

Optional Rope Hoist



Optional Cable Safety Attachment



765-987-7999
 866-637-5611
 411 S. Pearl St.
 Spiceland IN 47385 USA
 www.progressivescg.com

PROJECT: _____

 ARCHITECT: _____
 CONTRACTOR: _____
 SUPPLIER: _____
 DATE: _____ REVISED: _____